


IPC Motherboards MB898

LGA775 Intel® Core™2 Duo ATX Motherboard w/ Intel® Q965 Express Chipset

Core™2 Duo-Based

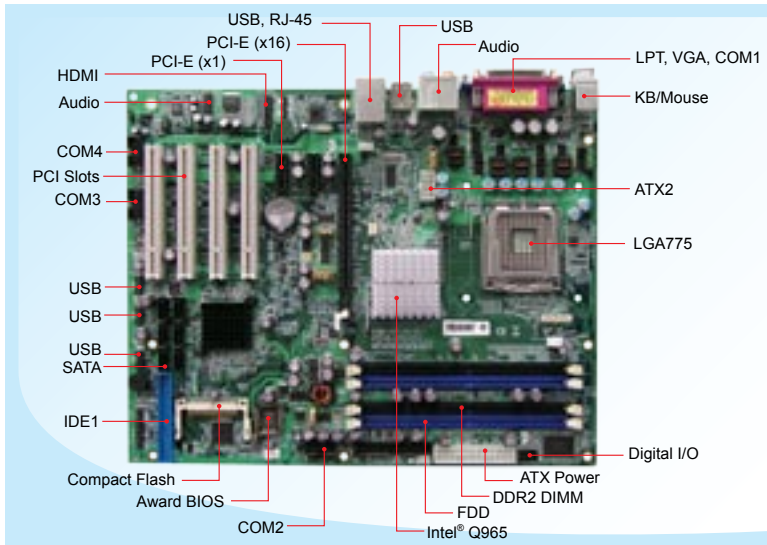

Features

- Supports Intel® Core™2 Duo / Pentium® D / Intel® Pentium® 4 HT / Celeron® D processors
Up to 2.6GHz, 533MHz/800MHz/1066MHz FSB
- DDR2 DIMM x 4, Max. 8GB
- 10/100 or Gigabit Ethernet on board
- Integrated Intel® Q965 Express VGA
- 4 x SATA II, 10 x USB 2.0, 4 x COM
- Digital I/O, Watchdog timer
- 4 x PCI, 2 x PCI-E (x1), 1 PCI-E (x16)

System

CPU	Socket LGA775 for Intel® Core™2 Duo / Pentium® D / Intel® Pentium® 4 HT / Celeron® D, up to 2.6GHz
System Memory	DDR2 DIMM x 4, Max. 8GB (DDR2 533/667/800)
System Chipset	Intel® Q965 Express, 533MHz/800MHz/1066MHz FSB
BIOS	Award
Watchdog Timer	256 levels
SSD	CF Socket, Type II
H/W Monitor	Yes
Expansion Slot	4 PCI, 2 PCI-E (x1), 1 PCI-E (x16)

Graphics

VGA Controller	Intel® Q965 Express integrated for CRT
VGA Memory	Supports Intel® Dynamic Video Memory Technology (DVMT); Max. shared memory: 384MB
LCD Interface	N/A

Ethernet

Controller	Intel® 82562V10/100 LAN, optional Intel® 82556DC PCI Express Gigabit LAN
Connector	RJ-45 on board

Multi I/O

Chipset	ICH8, Winbond 83627EHG + Fintek F81216 1x IDE (UDMA33/66/100), 1x FDD, 1x KB, 1x Mouse, 4x RS-232, 4x SATA II
USB	4 ports on board Pin header for 6 ports (USB 2.0)
Audio	Intel® High Definition Audio + AC97 codec, with 7.1 channels
Others	IrDA, Digital I/O (4-in/4-out)

Mechanical and Environmental

Dimensions	305mm x 244mm (12" x 9.6")
Max. Power Requirement	Intel® Core™2 Duo (E6400) 2.13GHz w/ 2GB DDR2 memory +3.3V: 6.58A +5V: 3.12A +5VSB: 0.43A +12V: 1.15A CPU Input +12V: 3.37A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-68°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

MB898-R	LGA775 Q965 ATX motherboard w/ VGA and 10/100 Ethernet (RoHS compliant)
MB898F-R	LGA775 Q965 ATX motherboard w/ VGA, PCI Express Gigabit Ethernet and SATA x4 (RoHS compliant)
MB898RF-R	LGA775 Q965 ATX motherboard w/ VGA, PCI Express Gigabit Ethernet and SATA x6 w/ RAID support (RoHS compliant)

Remarks:

* Specifications are subject to change without prior notice.